


DR-481 / DR-961



OeL is proud to offer Justin, Inc. power supplies that adhere to our "Quality Componentry" Standards of excellence.

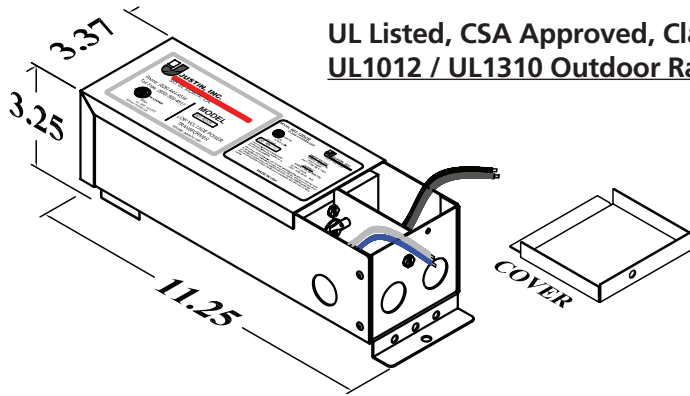

**UL Listed, CSA Approved, Class 2
UL1012 / UL1310 Outdoor Rated**

- Indoor/Outdoor Enclosure
- Conduit Ready
- Manual Reset Overload Protection
- Reliable Power Source
- LED Lighting Applications
- Magnetic Dimmer Ready
- Dimmable 120V Input
- Made in USA
- UL Listed / UL Recognized
- CSA Approved

	INPUT			OUTPUT		
Model :	VAC	Hz	AMPS	VDC	AMPS	WATTS
DR-481-24DCR	120	50/60	0.63	24VDC	2A	48
DR-961-24DCR	120	50/60	1.12	24VDC	4A	96

INDIVIDUAL CIRCUIT DC POWER SUPPLY SPECIFICATIONS

Description	24V Model Value	Unit
Input Voltage	120	Volts AC, 1 AMP Max.
Output Voltage	24.0 +/- 0.3	Volts DC
Output Current	2A, 48W/4A, 96W	Amps
Current Limit	2.5/4.5 +/- 0.25	Amps
Load Regulation	2%	Volts
Line Regulation	5%	Volts
Input Regulation	50-60	Hertz
Power Factor	.85 Typical	
Efficiency	80 Typical	%
MTBF	100,000	1 Hour
Operating Environment (AMB)	-30 to +60	Deg °
Function Surface Temp. (25 C AMB)	-40 to +80	Deg °
Storage Temp	-65 to +90	Deg °
Humidity	100 (Non Cond)	%
Size	11.25 x 3.37 x 3.25	Inches
Shipping Weight	7.0	Pounds

OeL retains the right to modify the design of our products at any time as part of the company's continual product improvement program

REV: 160815:0218



By OenergyLIGHTING, Inc.

855.955.1055 | 1110 Sligh Blvd., Orlando, FL 32806



Proudly made in Orlando, FL
by OenergyLIGHTING, Inc.

Project: _____

Designer: _____

Fixture: _____